




Ref. **9439**

Frez węglkowy 3Z do aluminium polerowana powłoka 45°

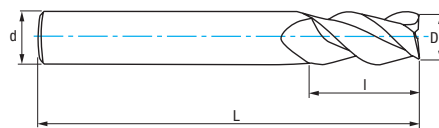

Materiały		Vc (m/min)	Prędkość posuwu fz/rev. (mm/z)						
Grupa	Sub.	HM	Ø 4	Ø 6	Ø 8	Ø 10	Ø 12	Ø 16	Ø 20
N	N.1	180-250	0,020	0,040	0,040	0,060	0,060	0,080	0,120
	N.2	180-250	0,020	0,040	0,040	0,060	0,060	0,080	0,120
	N.3	350-500	0,035	0,060	0,060	0,070	0,070	0,090	0,120
	N.4	350-450	0,035	0,060	0,060	0,070	0,070	0,090	0,120
	N.5	190-290	0,035	0,050	0,050	0,070	0,070	0,090	0,120

$$\text{r.p.m.} = \frac{V_c \times 1.000}{\pi \times \phi}$$

K = Współczynnik korygujący

$$V_f (\text{mm/min.}) = \text{r.p.m.} \times Z \times f_z \times K$$

D mm	d mm	L mm	l mm	Z	N° Art. HM	€
3,00	3,00	38	8	3	30438	22,54
4,00	4,00	50	8	3	30439	22,54
5,00	5,00	50	10	3	30440	22,54
6,00	6,00	57	10	3	30442	25,05
8,00	8,00	63	16	3	30443	37,58
10,00	10,00	72	19	3	30445	49,39
12,00	12,00	83	22	3	30446	67,65
16,00	16,00	92	26	3	30447	103,79
20,00	20,00	104	32	3	30452	171,43

DIN 6535 HB  
na żądanie